



1: 3 Auto RF Transformer Frequency: 5-1200MHZ.

Base dimension

Feature:

- .1:3 Auto RF transformer.
- .SMT part.
- .Packaging 2000pcs per reel.
- .weld connect.
- .260 degree compatible.

ROHS COMPLIANT

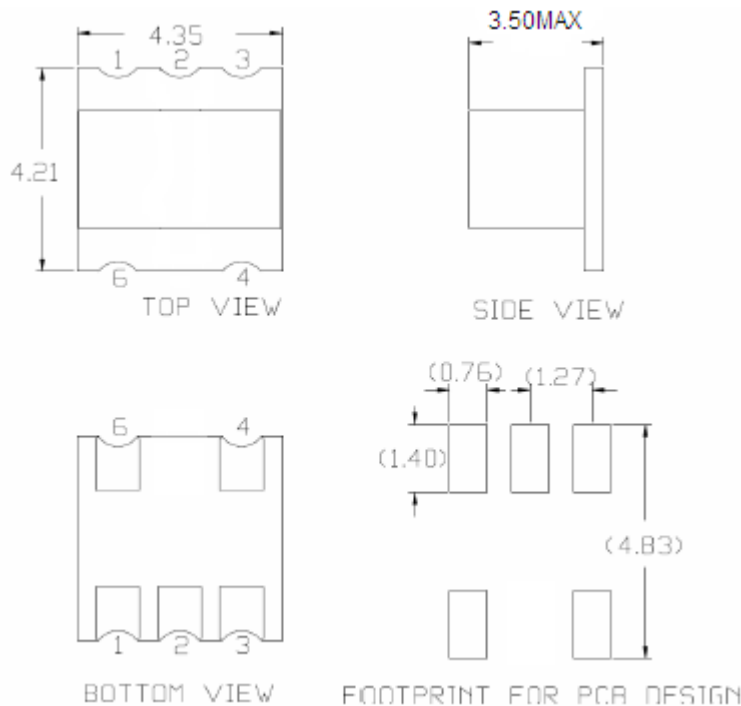

Schematic

Description:

.LH Corporation S013220 is a 1:3 Auto RF transformer.

Low cost SMT transmission transformer designed high volume applications.

PIN CONFIGURATION	
PIN	FUNCTION
1	Secondary Dot
2	Ground
3	Primary
4	N/A
5	N/A

Electrical Specifications: TA=25°C, Zo=75Ω					
Parameter	Test Conditions	Units	Min.	Typ.	Max.
Mainline loss	5-1200MHz	dB	---	1.1	1.5
RF Power Rating (max)		250mw			
DC Current Rating (max)		250mA			
Test Impedance (50Ω,75Ω, etc.)		75OHM			
Operating Temperature Range		-40°C Min		+145°C Max	

performance.

Website: <http://www.zslhdz.cn>
<http://www.zslhdzc.com>

Sam Ye 叶生.
 Xiao 肖先生.

Email: 1039078264@qq.com zslhdz6@163.com
 Email: zslhdz@163.com

Mainline Loss

