



Turns Ratio Pri:Sec +/-5%	OCL (mH Min)	CW/W pF Max	LL (uH Max)	DCR Pri Ω Max	Package/ Schematic	Primary Pins
1CT:1CT&1CT:2CT	1.20 & 1.20	30 & 30	.60 & .60	0.70 & 0.70	BH/1	16-14, 6-8

Mechanicals

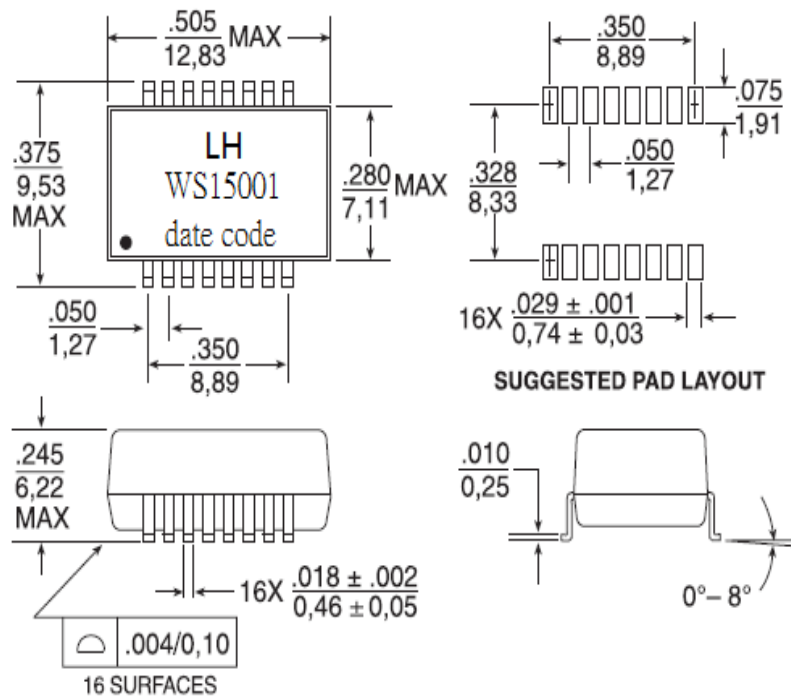

Schematics



Dimensions: $\frac{\text{Inches}}{\text{mm}}$ Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$

Weight1.0 grams
Tape & Reel600/reel
Tube40/tube

operating temperature range is 0C to 70C. Extended (EXT) operating temperature range is -40C to +85C.