
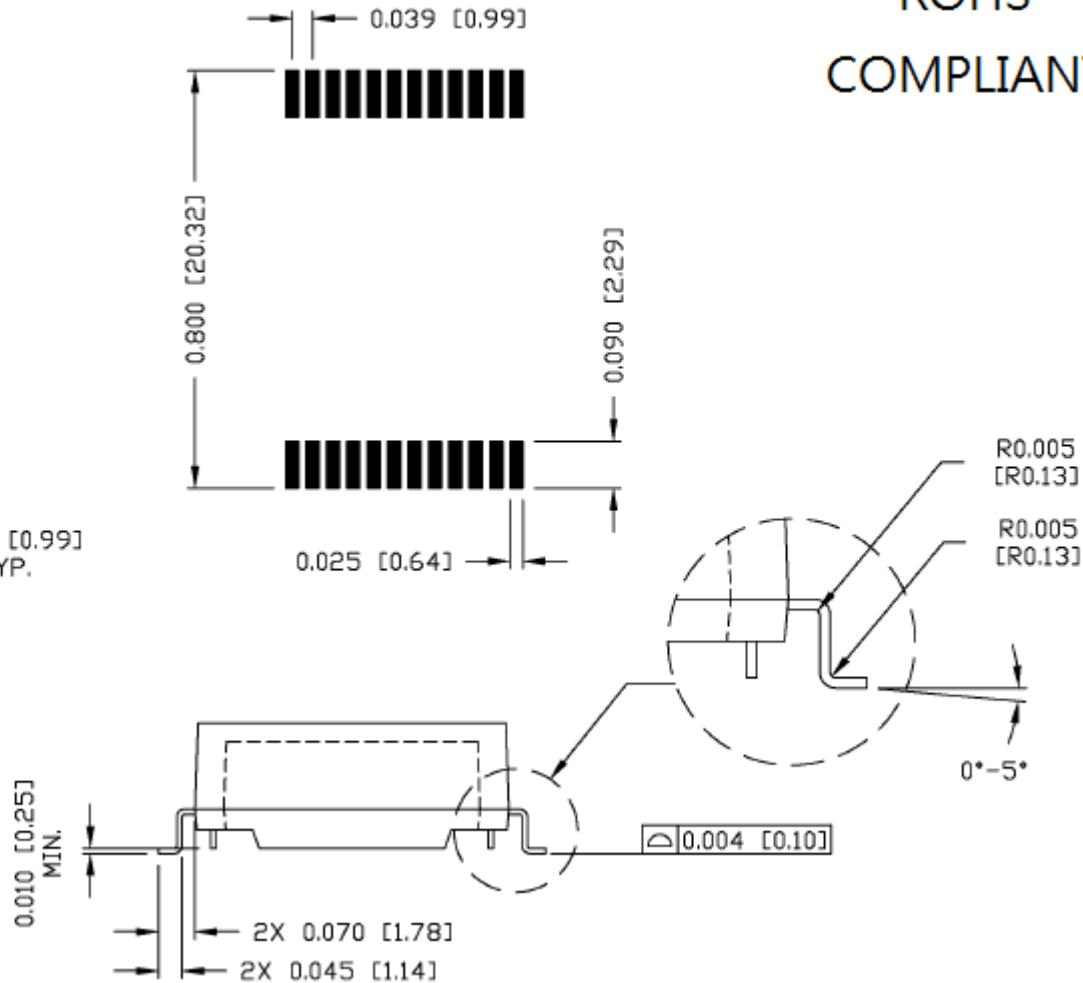



ROHS
COMPLIANT

suggest pcb design

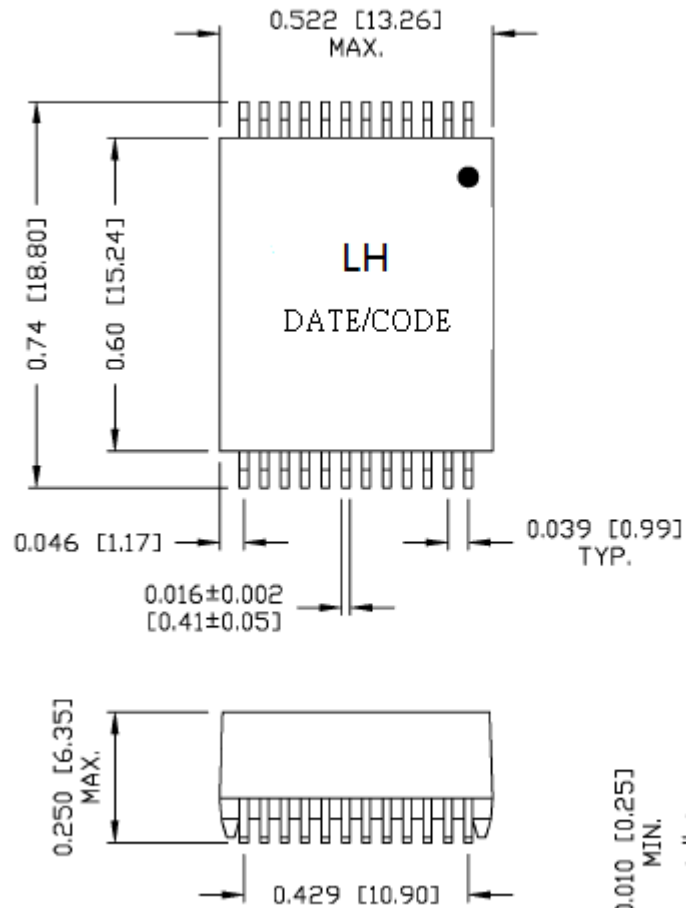

ELECTRICAL CHARACTERISTICS @ 25°C

ROHS
COMPLIANT

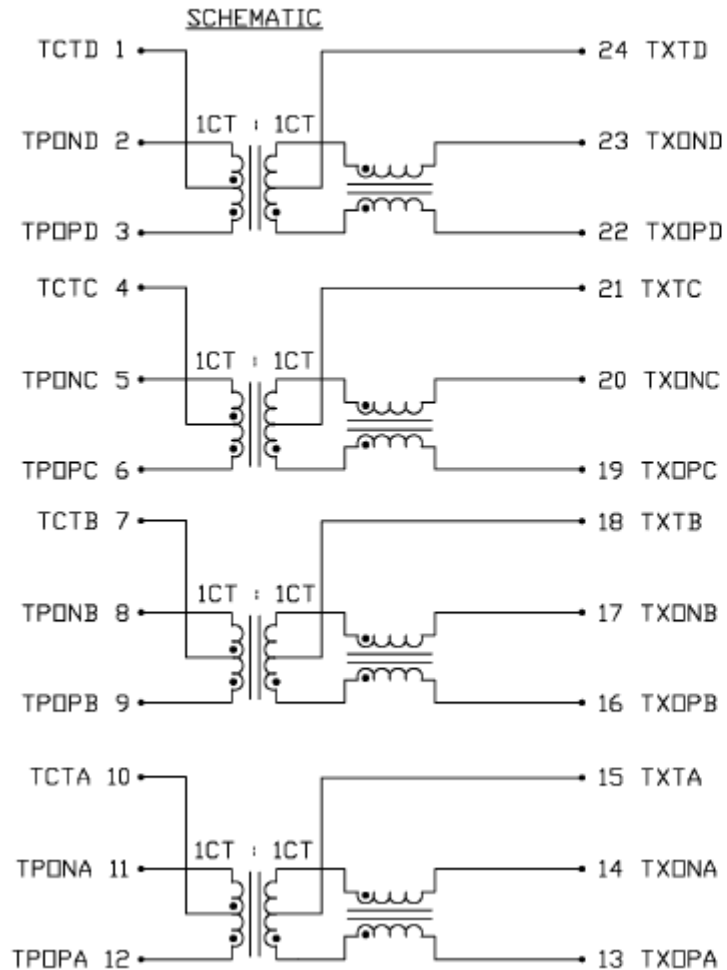

TURNS RATIO	
(3-1-2) : (22-24-23)	1CT : 1CT
(6-4-5) : (19-21-20)	1CT : 1CT
(9-7-8) : (16-18-17)	1CT : 1CT
(12-10-11) : (13-15-14)	1CT : 1CT

DCL	350μH MIN. AT 100kHz, 100mV WITH 8mA DC BIAS @25°C
INSERTION LOSS	1.1dB MAX. @ 0.1 TO 1MHz 0.5dB MAX. @ 1 TO 65MHz 1.0dB MAX. @ 80MHz 1.2dB MAX. @ 125MHz
RETURN LOSS UNDER 100 OHM ±15% ENVIRONMENT	18dB MIN. @ 0.5 TO 40 MHz 12-20LOG (f/80MHz) MIN. @ 40 TO 100 MHz
COMMON TO COMMON REJECTION	30dB MIN. @ 0.1 TO 100 MHz
CROSSTALK	@ 1 TO 100 MHz 33-20 LOG (F/100 MHz) dB MIN
HIPOT	PER HAND-WORK-03
OPERATION TEMPERATURE	-40°C TO 85°C