


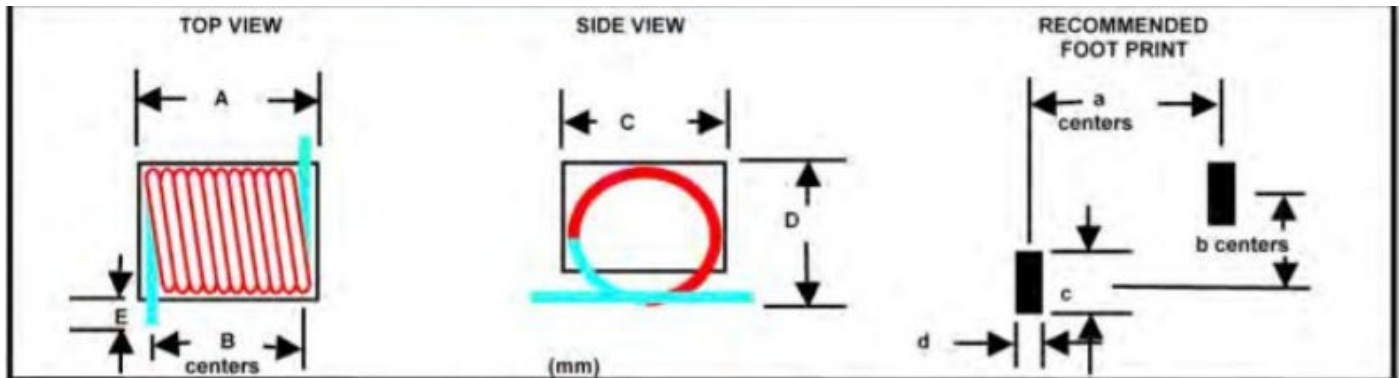

Part Size	A	B	C	D	E
A	.195 MAX (4.95)	.170 ±.015 (4.32)	.150 MAX (3.81)	.165 MAX (4.20)	.060 ±.015 (1.53)
B	.415 MAX (10.55)	.314 ±.020 (7.98)	.250 MAX (6.35)	.235 MAX (5.97)	.050 ±.015 (1.27)

Part Size	FOOT PRINT			
	a	b	c	d
A	.170 (4.33)	.103 (2.62)	(.203) 5.16	.058 (1.48)
B	.314 (7.99)	.095 (2.42)	(.185) 4.70	.080 (2.04)

Part Number*	Turns	L nH	Q Min.	Test Freq. MHz	SRF MHz Min.	DCR mohm Max.	Current Rating Amps	Size
3009-1J	4	22	100	150	3200	4.2	3.0	A
3009-2J	5	27	100	150	2700	4.0	3.5	A
3009-3J	5	33	100	150	2500	4.8	3.0	A
3009-4J	6	39	100	150	2100	4.6	3.0	A
3009-5J	6	47	100	150	2100	5.6	3.0	A
3009-6J	7	56	100	150	1500	6.2	3.0	A
3009-7J	7	68	100	150	1500	8.2	2.5	A
3009-8J	8	82	100	150	1300	9.4	2.5	A
3009-9J	8	100	100	150	1200	12.3	1.7	A
3009-10J	9	120	100	150	1100	17.3	1.5	A
3009-11J	9	90	95	50	1140	15.0	3.5	B
3009-12J	10	111	87	50	1020	15.0	3.5	B
3009-13J	11	130	87	50	900	20.0	3.0	B
3009-14J	12	169	95	50	875	25.0	3.0	B
3009-15J	13	206	95	50	800	30.0	3.0	B
3009-16J	14	222	92	50	730	35.0	3.0	B
3009-17J	15	246	95	50	685	35.0	3.0	B
3009-18J	16	307	95	50	660	35.0	3.0	B
3009-19J	17	380	95	50	590	50.0	2.5	B
3009-20J	18	422	95	50	540	60.0	2.5	B
3009-21J	19	491	95	50	535	65.0	2.0	B
3009-22J	20	538	87	50	490	90.0	2.0	B